

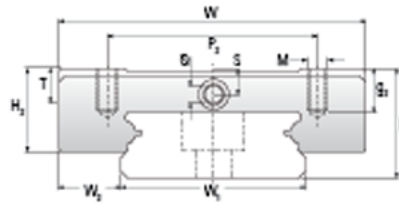


## NMR 12WN EE Assembly

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NMR 12WN EE Assembly today!

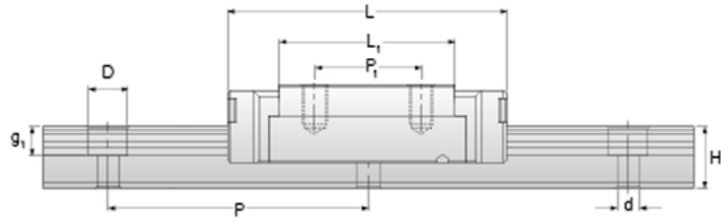

Optional Bottom Tapped Mount Rail

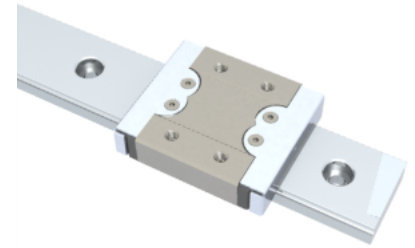

### Dimensions

H [mm]	14
W2 [mm]	8

### Wide Miniature Block Four Mounting Holes

#### Details

Size [mm]	12
-----------	----

#### Dimensions

W [mm]	40
L [mm]	45.8
L1 [mm]	31
h2 [mm]	10.9
P1 [mm]	15
P2 [mm]	28
M x g2	M3 x 3.5
Ø [mm]	1.3
S [mm]	3.1
T [mm]	4.5

#### Forces and Torques

Basic Load Ratings C [N]	3065
Basic Load Ratings C0 [N]	5200
Static Moment Ratings-Ma [N-m]	63.7
Static Moment Ratings-Mb [N-m]	26.3
Static Moment Ratings-Mc [N-m]	26.3

#### Weight

Weight-Block [g]	68
------------------	----

### Wide Miniature Rail Top Mount Single Row

#### Details

Size [mm]	12
-----------	----

#### Dimensions

H [mm]	14
W1 [mm]	24
H1 [mm]	8.5
P [mm]	40
D [mm]	8
d1 [mm]	4.5
g1 [mm]	4.5

#### Weight

Weights-Rail [g/m]	1472.0
--------------------	--------

### Wide Miniature Rail Bottom Tapped Mount Single Row

#### Details

Size [mm]	12
-----------	----

#### Dimensions

H1 [mm]	9.5
W1 [mm]	42
P [mm]	40
M1	M5 x 0.8

#### Weight

