


## NMR 12WL EZ Assembly

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your NMR 12WL EZ Assembly today!

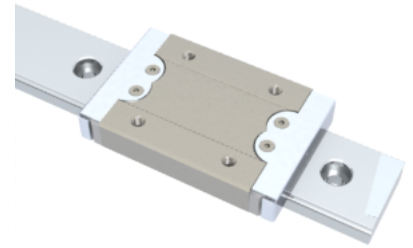

Optional Bottom Tapped Mount Rail

<b>Dimensions</b>	
H [mm]	14
W <sub>2</sub> [mm]	8
<b>Wide Miniature Block Four Mounting Holes</b>	
<b>Details</b>	
Size [mm]	12
<b>Dimensions</b>	
W [mm]	40
L [mm]	60.8
L <sub>1</sub> [mm]	46
h <sub>2</sub> [mm]	10.9
P <sub>1</sub> [mm]	28
P <sub>2</sub> [mm]	28
M × g <sub>2</sub>	M3 × 3.5
∅ [mm]	1.3
S [mm]	3.1
T [mm]	4.5
<b>Forces and Torques</b>	
Basic Load Ratings C [N]	4070
Basic Load Ratings C0 [N]	7800
Static Moment Ratings-M <sub>a</sub> [N-m]	95.6
Static Moment Ratings-M <sub>b</sub> [N-m]	56.4
Static Moment Ratings-M <sub>c</sub> [N-m]	56.4
<b>Weight</b>	
Weight-Block [g]	96
<b>Wide Miniature Rail Top Mount Single Row</b>	
<b>Details</b>	
Size [mm]	12
<b>Dimensions</b>	
H [mm]	14
W <sub>1</sub> [mm]	24
H <sub>1</sub> [mm]	8.5
P [mm]	40
D [mm]	8
d <sub>1</sub> [mm]	4.5
g <sub>1</sub> [mm]	4.5
<b>Weight</b>	
Weights-Rail [g/m]	1472.0
<b>Wide Miniature Rail Bottom Tapped Mount Single Row</b>	
<b>Details</b>	
Size [mm]	12
<b>Dimensions</b>	
H <sub>1</sub> [mm]	9.5
W <sub>1</sub> [mm]	42
P [mm]	40
M <sub>1</sub>	M5 × 0.8
<b>Weight</b>	

