


NH15TR Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH15TR Assembly today!





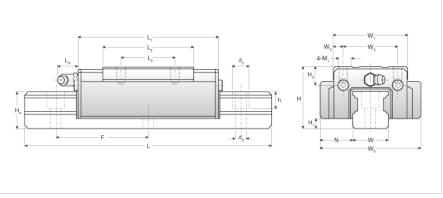

Dimensions	
H [mm]	28
H1 [mm]	4.6
N [mm]	9.5
Metric Profile Rail	
(Rail)Details	
Size [mm]	15
Туре	Standard
(Rail)Dimensions	
d2 [mm]	7.5
d3 [mm]	4.5
h [mm]	7
H4 [mm]	17
F [mm]	60
W [mm]	15
Maximum Length [mm]	3000
(Rail)Weight	4.7
Weights-Rail [kg/m]	1.7
Metric Runner Block, Heavy Load, High Speed, 4 Tapped Holes On Runner Block (Runner Block)Details	
Size [mm]	15
(Runner Block)Dimensions	10
H3 [mm]	6
L1 [mm]	71
L2 [mm]	41
L3 [mm]	26
L4 [mm]	3
M1 x I	M4X5
W1 [mm]	34
W2 [mm]	26
W3 [mm]	4
W5 [mm]	48
(Runner Block)Forces and Torques	
Basic Load Ratings C [kN]	8.43
Basic Load Ratings C [lbf]	1895
Basic Load Ratings C0 [kN]	13.53
Basic Load Ratings C0 [lbf]	3041
Static Moment Ratings-Ma [kN-m]	0.07
Static Moment Ratings-Ma [lb-in] Static Moment Ratings-Mb [kN-m]	608 0.07
Static Moment Ratings-Mb [lb-in]	608
Static Moment Ratings-Mb [ib-in] Static Moment Ratings-Mc [kN-m]	0.13
Static Moment Ratings-Mc [Ib-in]	1128
(Runner Block)Weight	1120
Weight-Block [kg]	0.19
(Runner Block)Grease Fitting	0.10
Grease Fitting Part Number	PB1021B
Greade Fitting Fait Mainber	1 5 102 15