


NH55LER Assembly

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NH55LER Assembly today!





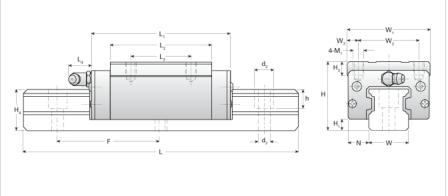

| Dimensions | |
|---|------------|
| H [mm] | 80 |
| H1 [mm] | 14 |
| N [mm] | 23.5 |
| Metric Profile Rail | 20.0 |
| (Rail)Details | |
| Size [mm] | 55 |
| Type | Standard |
| (Rail)Dimensions | Statitualu |
| d2 [mm] | 23 |
| d3 [mm] | 16 |
| | 24 |
| h [mm] H4 [mm] | 48 |
| | |
| F [mm] | 120 53 |
| W [mm] | |
| Maximum Length [mm] | 3000 |
| (Rail)Weight | 40.5 |
| Weights-Rail [kg/m] | 16.5 |
| Metric Runner Block, Ultra Heavy Load, Narrow Width, 4 Tapped Holes | |
| (Runner Block)Details | |
| Size [mm] | 55 |
| (Runner Block)Dimensions | |
| L1 [mm] | 200 |
| L2 [mm] | 156 |
| L3 [mm] | 95 |
| L4 [mm] | 16 |
| M1 x l | M12x18 |
| H3 [mm] | 18 |
| W1 [mm] | 100 |
| W2 [mm] | 75 |
| W3 [mm] | 12.5 |
| (Runner Block)Forces and Torques | |
| Basic Load Ratings C [kN] | 119.05 |
| Basic Load Ratings C [lbf] | 26756 |
| Basic Load Ratings C0 [kN] | 183.09 |
| Basic Load Ratings C0 [lbf] | 41147 |
| Static Moment Ratings-Ma [kN-m] | 3.71 |
| Static Moment Ratings-Ma [lb-in] | 32810 |
| Static Moment Ratings-Mb [kN-m] | 3.71 |
| Static Moment Ratings-Mb [lb-in] | 32810 |
| Static Moment Ratings-Mc [kN-m] | 5.31 |
| Static Moment Ratings-Mc [lb-in] | 47046 |
| (Runner Block)Weight | |
| Weight-Block [kg] | 5.80 |
| (Runner Block)Grease Fitting | |
| Grease Fitting Part Number | B-PT 1/8 |