


PowerAC 3 3/8"-1 1/2 RA

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerAC 3 3/8"-1 1/2 RA today!

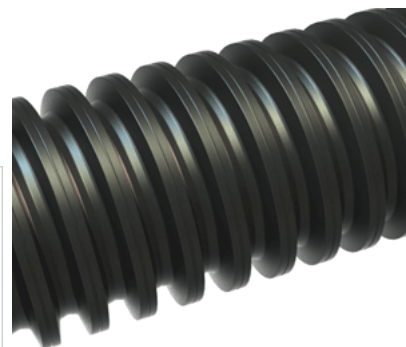

Product Info

| | |
|------------------|-------------|
| Screw Code | 332-RA |
| Thread Direction | RH |
| Screw Material | 4140 Series |

Details

| | |
|---|-------|
| Lead [in] | 0.667 |
| Starts | 1 |
| Pitch [in] | 0.667 |
| Turns Per Inch | 1.5 |
| Threads per Inch | 1.5 |
| Thread Code | 332 |
| Form | 2G |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 65 |
| End Code for Type 4 [* Journals may show tracings of the thread] | 39* |

Dimensions

| | |
|--------------------------------|-------|
| A - Root Diameter Minimum [in] | 2.652 |
| D - Nominal Rod Diameter [in] | 3.375 |

Part Numbers

| | |
|--------------------|-------|
| 3 ft. Part Number | |
| 6 ft. Part Number | 12332 |
| 12 ft. Part Number | 13332 |
| 20 ft. Part Number | 10332 |

Performance Specifications

| | |
|---------------------------|--------|
| Lead Accuracy +/- [in/in] | 0.0006 |
|---------------------------|--------|

Weight

| | |
|------------------------|-------|
| Screw Weight [lb./ft.] | 20.15 |
|------------------------|-------|