


## MBN12x2R-3FW

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your MBN12x2R-3FW today!

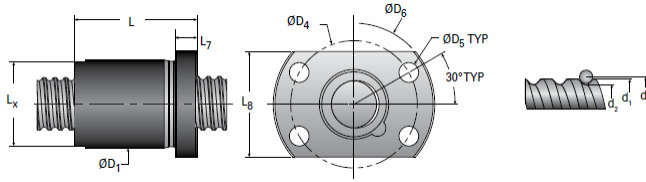

### Product Info

Nominal Rod Diameter [mm]	12
Material	Alloy
Thread Direction	RH

### Details

Lead [mm]	2
Active Turns	3
Nominal Ball Dia. [mm]	1.588
Screw Weight [kg/m]	0.72
Nut Weight [kg]	0.05
Lube Hole Locaton	-
End Code for Types 1,2, and 3	10
End Code for Types 4	6
End Code for Types 5	-
End Code for Types 6	10
End Code for Types 7	8

### Performance Specifications

Dynamic Load Ca [N]	2820
Static Load [N]	4730
Linear Speed (Based on DN Values) [mm/min]	11700

### Screw Dimensions

d0 [mm]	12
d1 [mm]	11.44
d2 [mm]	10.32

### Nut Dimensions

D1 (g6) [mm]	20
L [mm]	28
L1 [mm]	-
Lx [mm]	19
Lz [mm]	2.5
L3 (min) [mm]	-
L7 [mm]	5
L8 [mm]	24
D4 [mm]	29
D5 [mm]	4 × 4.5
D6 [mm]	37